



Inline filter with filter element according to DIN 24550

**Type 50LEN0040 to 0400;
50LE0130, 0150**



- ▶ Size according to **DIN 24550**: 0040 to 0400
- ▶ additional sizes: 0130, 0150
- ▶ Nominal pressure 50 bar [725 psi]
- ▶ Connection up to 1 1/2"
- ▶ Operating temperature -10 °C to 100 °C [14 °F to 212 °F]

Features

Inline filters are used in hydraulic systems for separating solid materials from the fluids and lubricating oils. They are intended for attachment in pipelines.

They distinguish themselves by the following:

- ▶ Filters for inline installation
- ▶ Special highly efficient filter materials
- ▶ Filtration of very fine particles and high dirt holding capacity across a broad pressure differential range
- ▶ High collapse resistance of the filter elements
- ▶ By default equipped with mechanical optical maintenance indicator with memory function
- ▶ Available as an option with different electronic switching elements, modular design
- ▶ Optional bypass valve integrated in the filter housing

Ordering code filter

01	02	03	04	05	06	07	08	09	09
50LE			-		-		-		-

Series

01	Inline filter 50 bar [725 psi]	50LE
----	--------------------------------	------

Filter element

02	with filter element according to DIN 24550	N
----	---	---

Size

03	LEN... (Filter element according to DIN 24550)	0040 0063 0100 0160 0250 0400
	LE... (Filter element according to standard)	0130 0150

Filter rating in μm

04	Nominal Stainless steel wire mesh, cleanable	G10 G25 G40 G60 G100
	Nominal Filter paper, not cleanable	P10 P25
	Absolute (ISO 16889; $\beta_{x(c)}$ ≥ 200) Non-woven glass fiber media, not cleanable	H3XL H6XL H10XL H20XL

Pressure differential

05	max. admissible pressure differential of the filter element 30 bar [435 psi], with bypass valve	A00
	max. admissible pressure differential of the filter element 330 bar [4786 psi], without bypass valve	B00

Maintenance indicator

06	Maintenance indicator, mech./optical, switching pressure 0.8 bar [11.6 psi] – bypass cracking pressure 2.5 bar [36 psi]	V0.8
	Maintenance indicator, mech./optical, switching pressure 1.5 bar [21.8 psi] – bypass cracking pressure 2.5 bar [36 psi]	V1.5
	Maintenance indicator, mech./optical, switching pressure 2.2 bar [32 psi] – bypass cracking pressure 3.5 bar [51 psi]	V2.2
	Maintenance indicator, mech./optical, switching pressure 5.0 bar [72.5 psi] – bypass cracking pressure 7 bar [102 psi]	V5,0

Seal

07	NBR seal	M
	FKM seal	V

Connection

08	Frame size	0040-0100	0130-0150	0160-0400		
	Connection					
	G 3/4	●			Pipe thread according to ISO 228	R3
	G 1		●			R4
	G 1 1/2			●		R6
	SAE 12	X			Pipe thread according to SAE J1926	U4
	SAE 16		X			U9
	SAE 24			X		U6
	<div><div>●</div> Standard connection</div> <div><div>X</div> Alternative connection</div>					

Supplementary information

Ordering code filter

01	02	03	04	05	06	07	08	09	09
50LE			-		-	-	-	-	-

09	without bypass valve (only possible in connection with filter element version "A00") ¹⁾	NB
	Manufacturer's inspection certificate M according to DIN 55350 T18	Z1

¹⁾ **Attention:** If this option is selected and the maintenance indicator is not observed, the filter element may collapse in case of operating pressures of more than 30 bar [435 psi].

Order example:

50LEN0100-H3XLA00-V5,0-M-R4

Further versions (filter materials, connections,...) are available on request.

Preferred types

NBR seal, with bypass, flow specifications for 30 mm²/s [143 SUS]

Inline filter 50 LE(N), filter rating **3 µm**

Type	Flow in l/min [gpm] at Δp = 1 bar [14.5 psi]	Filter		
50LEN0040-H3XLA00-V2,2-M-..	23 [6.08]	..R3		..U4
50LEN0063-H3XLA00-V2,2-M-..	30 [7.93]	..R3		..U4
50LEN0100-H3XLA00-V2,2-M-..	44 [11.62]	..R3		..U4
50LE0130-H3XLA00-V2,2-M-..	74 [19.55]	..R4		..U9
50LE0150-H3XLA00-V2,2-M-..	89 [23.51]	..R4		..U9
50LEN0160-H3XLA00-V2,2-M-..	132 [34.87]	..R6		..U6
50LEN0250-H3XLA00-V2,2-M-..	190 [50.19]	..R6		..U6
50LEN0400-H3XLA00-V2,2-M-..	250 [66.04]	..R6		..U6

Inline filter 50 LE(N), filter rating **6 µm**

Type	Flow in l/min [gpm] at Δp = 1 bar [14.5 psi]	Filter		
50LEN0040-H6XLA00-V5,0-M-..	31 [8.19]	..R3		..U4
50LEN0063-H6XLA00-V5,0-M-..	46 [12.15]	..R3		..U4
50LEN0100-H6XLA00-V5,0-M-..	57 [15.06]	..R3		..U4
50LE0130-H6XLA00-V5,0-M-..	94 [24.83]	..R4		..U9
50LE0150-H6XLA00-V5,0-M-..	103 [27.21]	..R4		..U9
50LEN0160-H6XLA00-V5,0-M-..	175 [46.23]	..R6		..U6
50LEN0250-H6XLA00-V5,0-M-..	226 [59.70]	..R6		..U6
50LEN0400-H6XLA00-V5,0-M-..	282 [74.50]	..R6		..U6

Inline filter 50 LE(N), filter rating **10 µm**

Type	Flow in l/min [gpm] at Δp = 1 bar [14.5 psi]	Filter		
50LEN0040-H10XLA00-V2,2-M-..	36 [9.51]	..R3		..U4
50LEN0063-H10XLA00-V2,2-M-..	69 [18.23]	..R3		..U4
50LEN0100-H10XLA00-V2,2-M-..	75 [19.81]	..R3		..U4
50LE0130-H10XLA00-V2,2-M-..	127 [33.55]	..R4		..U9
50LE0150-H10XLA00-V2,2-M-..	150 [39.63]	..R4		..U9
50LEN0160-H10XLA00-V2,2-M-..	210 [55.48]	..R6		..U6
50LEN0250-H10XLA00-V2,2-M-..	260 [68.68]	..R6		..U6
50LEN0400-H10XLA00-V2,2-M-..	300 [79.25]	..R6		..U6

Ordering code accessories

(dimensions in mm [inch])

Electronic switching element for maintenance indicators

01	02	03
WE	-	-

Maintenance indicator

01	electronic switching element	WE
----	------------------------------	----

Type of signal

02	1 switching point	1SP
	2 switching points, 3 LED	2SP
	2 switching points, 3 LED and signal suppression up to 30 °C [86 °F]	2SPSU

Connector

03	Round plug-in connection M12 x 1, 4-pole	M12 x 1
	Rectangular plug-in connection, 2-pole, design A according to EN-175301-803	EN175301-803


Material numbers of the electronic switching elements

Type	Signal	Switching points	Connector	LED
WE-1SP-M12 x 1	Changeover	1	M12 x 1	No
WE-2SP-M12 x 1	Normally open (at 75%) / normally closed contact (at 100%)	2		3 pieces
WE-2SPSU-M12 x 1				
WE-1SP-EN175301-803	Normally closed contact	1	EN 175301-803	No

Mating connectors according to IEC 60947-5-2

for electronic switching element with round plug-in connection M12 x 1


Mating connector suitable for K24 4-pole, M12 x 1
with screw connection, cable gland Pg9.

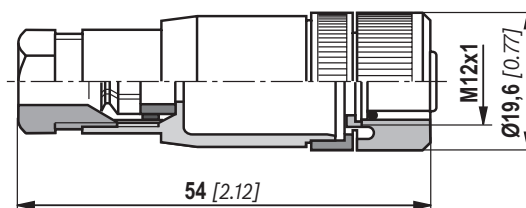

Mating connector suitable for K24-3m 4-pole,
M12 x 1 with potted-in PVC cable, 3 m long.

Line cross-section: 4 x 0.34 mm²

Core marking: 1 brown 2 white
3 blue 4 black

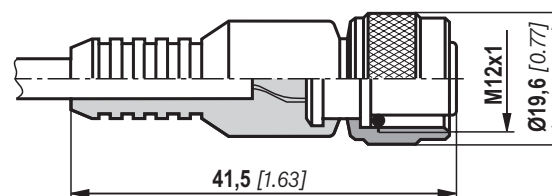

For more round plug-in connections and technical data refer to data sheet.

Order example:

Inline filter with mechanical optical maintenance indicator for $p_{nom.} = 50 \text{ bar}$ [725 psi] with bypass valve, size 0160, with filter element 10 µm and electronic switching element M12 x 1 with 1 switching point for hydraulic fluid mineral oil HLP according to DIN 51524.


Filter with mech. optical maintenance indicator: 50LEN0160-H10XLA00-V5,0-M-R6

Switching element: WE-1SP-M12 x 1


Mating connector: Mating connector suitable for K24 4-pole, M12 x 1
with screw connection, cable gland Pg9.

Symbols

Inline filter with bypass
and mechanical indicator




Inline filter without bypass
and with mechanical indicator




Electronic switching element for
maintenance indicator

Switching element Connector




WE-1SP-M12 x 1

Switching element Connector



WE-1SP-EN175301-803


Switching element Connector

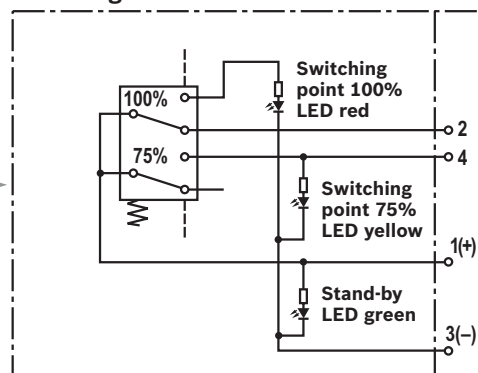

WE-2SP-M12 x 1

Circuit diagram drawn in plugged con-
dition (operating state)

Switching element Connector

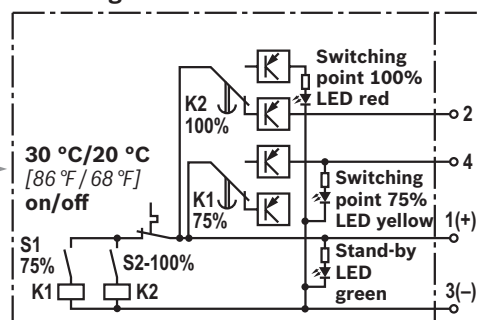

WE-2SPSU-M12 x 1

Circuit diagram drawn in plugged
condition at temperature > 30 °C [86 °F]
(operating state)

Function, section

The 50LE(N) inline filter is suitable for direct installation into pressure lines. It is installed upstream components to be protected.

It basically consists of filter head (1), a screwable filter bowl (2), filter element (3) as well as mechanical optical maintenance indicator (4). In case of filters with low-pressure-differential-stable filter elements (= code letter pressure differential A), there is an assembled bypass valve (5) as standard.


The installed spring (6) prevents possible vibrations of the filter element (3). During disassembly, the contact pressure of the spring (6) holds the filter element in the filter bowl (2).

Via the inlet, the fluid reaches the filter element (3) where it is cleaned. The dirt particles filtered out settle in the filter element (3). Via the outlet, the filtered fluid enters the hydraulic circuit.

The filter housing and all connection elements are designed so that pressure peaks - as they may e.g. occur in case of abrupt opening of large control valves due to the accelerated fluid quantity - can be securely absorbed. As of size 0160, the standard equipment comprises a drain screw (7).

By default, the filter is equipped with mechanical optical maintenance indicator (4). The electronic switching element (8) which has to be ordered separately is attached to the mechanical optical maintenance indicator (4) and held by means of a locking ring.

The electronic switching elements with 1 or 2 switching points are connected via a mating connector according to IEC-60947-5-2 or via a cable connection according to EN17301-803.

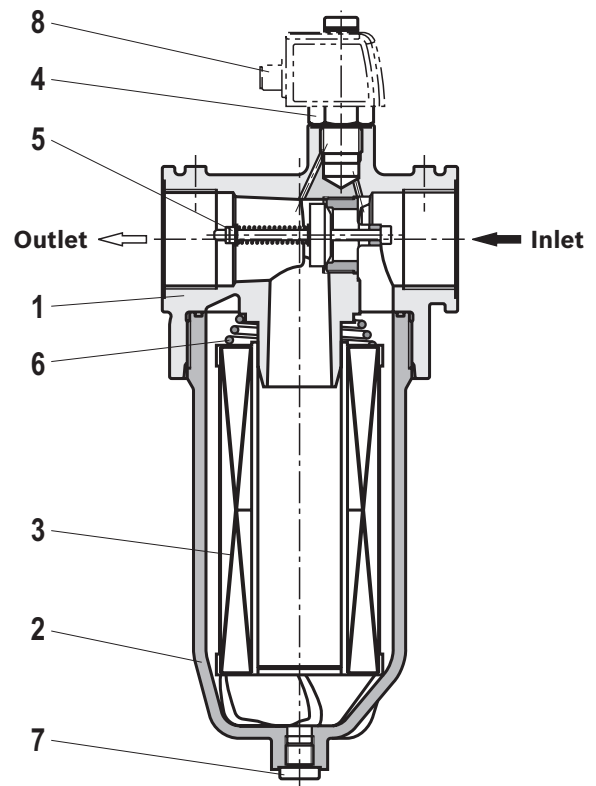

Type 50LEN0160

WARNING!

If the maintenance indicator is not observed while the element is exchanged, the bypass valve will open if the pressure differential increases. This means that part of the volume flow enters unfiltered into the clean side of the filter. Effective filtration is therefore no longer guaranteed.

Technical data

(For applications outside these parameters, please consult us!)

General					
Installation position			vertical		
Ambient temperature range			°C [°F] –10 ... +100 [14... +212] (shortly up to –30 [–22])		
Weight	NS	0040	0063	0100	0130
	kg [lbs]	1.05 [2.3]	1.1 [2.4]	1.2 [2.6]	1.91 [4.2]
	NS	0150	0160	0250	0400
	kg [lbs]	2.06 [4.5]	3.1 [6.8]	3.3 [7.3]	3.8 [8.4]
Volume	NS	0040	0063	0100	0130
	l [US gal]	0.27 [0.07]	0.39 [0.1]	0.58 [0.15]	0.89 [0.23]
	NS	0150	0160	0250	0400
	l [US gal]	1.1 [0.29]	1.31 [0.35]	1.89 [0.50]	2.84 [0.75]
Material	– Filter head		Aluminum		
	– Filter bowl		Aluminum		
	– Bypass valve		Aluminum / steel / POM		
	– Seals		NBR or FKM		
	– optical maintenance indicator	V0,8; V1,5; V2,2	Aluminum		
		V5,0	Brass		
	Electronic switching element		Plastic PA6		

Hydraulic			
Maximum operating pressure		bar [psi]	50 [725]
Hydraulic fluid temperature range		°C [°F]	-10 to +100 [+14 to +212]
Minimum conductivity of the medium		pS/m	300
Fatigue strength according to ISO 10771		Load cycles	> 10 ⁶ with max. operating pressure
Type of pressure measurement of the maintenance indicator		Pressure differential	
Assignment: Response pressure of the maintenance indicator / cracking pressure of the bypass valve		Response pressure of the maintenance indicator	Cracking pressure of the bypass valve
		bar [psi]	0.8 ± 0.15 [11.6 ± 2.2]
			2.5 ± 0.25 [36.3 ± 3.6]
			1.5 ± 0.20 [21.8 ± 2.9]
			2.5 ± 0.25 [36.3 ± 3.6]
			2.2 ± 0.30 [31.9 ± 4.4]
			3.5 ± 0.35 [50.8 ± 5.1]
			5.0 ± 0.50 [72.5 ± 7.3]
			7.0 ± 0.5 [101.5 ± 7.3]
Filtration direction		From the outside to the inside	

Electric (electronic switching element)						
Electrical connection		Round plug-in connection M12 x 1, 4-pole			Standard connection EN 175301-803	
		Version	WE-1SP- M12 x 1	WE-2SP- M12 x 1	WE-2SPSU- M12 x 1	WE-1SP- EN175301-803
Contact load, direct voltage		A _{max.}	1			
Voltage range		V _{max.}	150 (AC/DC)	10-30 (DC)		250 (AC)/200 (DC)
max. switching power with resistive load		W	20		70	
Switching type	– 75% signal		–	Normally open contact		–
	– 100% signal		Changeover	Normally closed contact		Normally closed contact
	– 2SPSU				Signal inter-connection at 30 °C [86 °F], return switching at 20 °C [68 °F]	
Display via LEDs in the electronic switching element 2SP...				Stand-by (LED green); 75% switching point (LED yellow) 100% switching point (LED red)		
Protection class according to EN 60529			IP 67		IP 65	
Ambient temperature range		°C [°F]	-25 to +85 [-13 to +185]			
For direct voltage above 24 V, spark extinguishing is to be provided for protecting the switching contacts.						
Weight	electronic switching element:					
	– with round plug-in connection M12 x 1		kg [lbs]	0.1 [0.22]		

Technical data

(For applications outside these parameters, please consult us!)

Filter element			
Non-woven glass fiber media H...XL		Single-use element on the basis of inorganic fiber	
		Filtration ratio according to ISO 16889 up to $\Delta p = 5 \text{ bar}$ [72.5 psi]	Achievable oil cleanliness according to ISO 4406 [SAE-AS 4059]
	H20XL	$\beta_{20}(c) \geq 200$	19/16/12 – 22/17/14
	H10XL	$\beta_{10}(c) \geq 200$	17/14/10 – 21/16/13
	H6XL	$\beta_6(c) \geq 200$	15/12/10 – 19/14/11
	H3XL	$\beta_3(c) \geq 200$	13/10/8 – 17/13/10
Admissible pressure differential	– A	bar [psi]	30 [435]
	– B	bar [psi]	330 [4785]

Compatibility with hydraulic fluids

Hydraulic fluid		Classification	Suitable sealing materials	Standards
Mineral oil		HLP	NBR	DIN 51524
Biodegradable	– insoluble in water	HETG	NBR	VDMA 24568
		HEES	FKM	
	– soluble in water	HEPG	FKM	VDMA 24568
Flame-resistant	– water-free	HFDU, HFDR	FKM	VDMA 24317
	– containing water	HFAS	NBR	DIN 24320
		HFAE	NBR	
		HFC	NBR	



Important information on hydraulic fluids!

- For more information and data on the use of other hydraulic fluids, please refer to data sheet or contact us!
- **Flame-resistant – containing water:** due to possible chemical reactions with materials or surface coatings of machine and system components, the service life with these hydraulic fluids may be less than expected. Filter materials made of filter paper P

(cellulose) may not be used, filter elements with filter materials made of glass fiber (HydroClean H...XL or wire mesh G) have to be used instead.







- **Biodegradable:** If filter materials made of filter paper are used, the filter life may be shorter than expected due to material incompatibility and swelling.

Characteristic curves H3XL

(measured with mineral oil HLP46 according to DIN 51524 at $T = 40\text{ }^{\circ}\text{C}$) [$104\text{ }^{\circ}\text{F}$])

Spec. weight: $< 0.9\text{ kg/dm}^3$ Δp -Q-characteristic curves for complete filters recommended initial Δp for design = 1 bar [14.5 psi]

Oil viscosity:
 — 140 mm²/s [649 SUS]
 - · - 68 mm²/s [315 SUS]
 - - - 30 mm²/s [143 SUS]

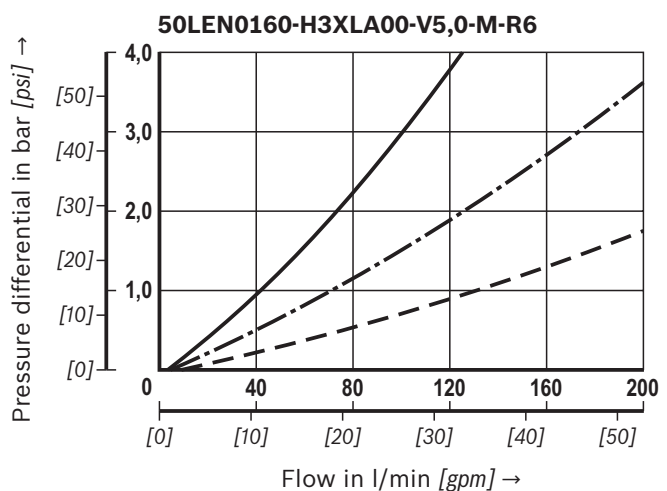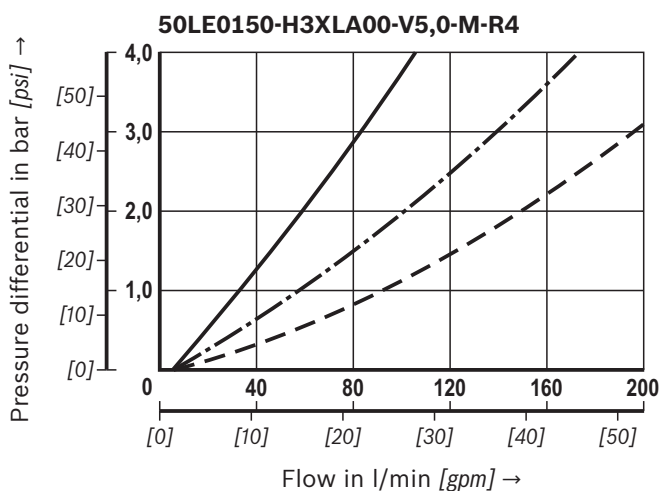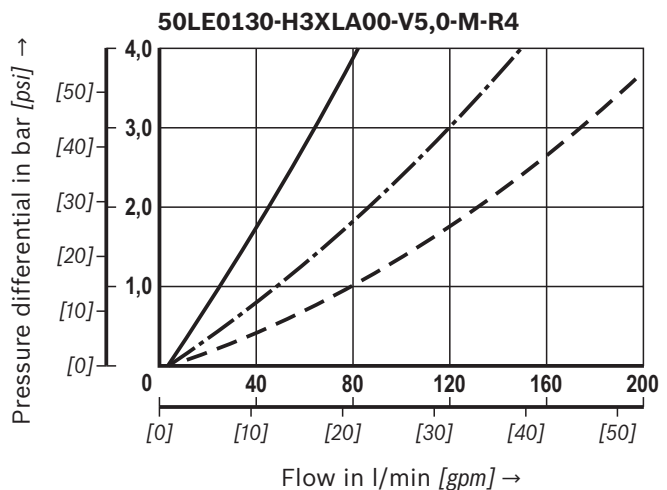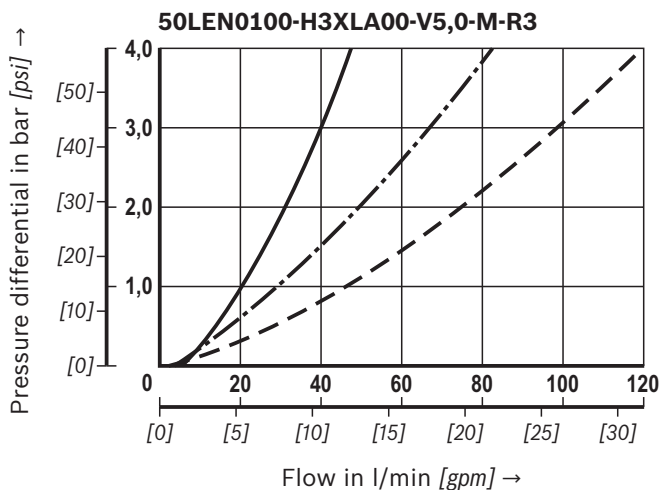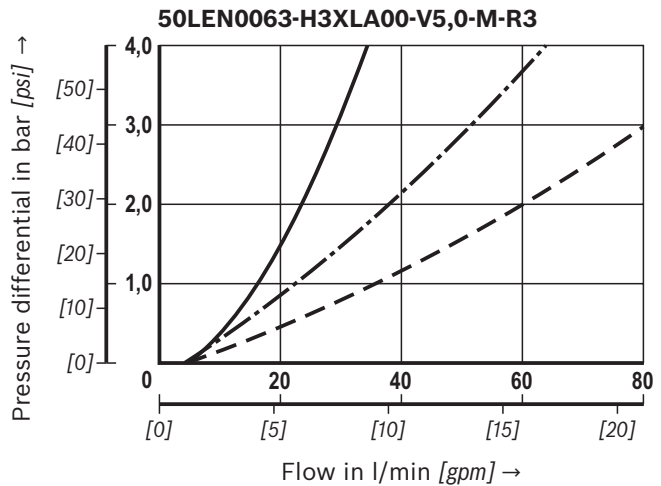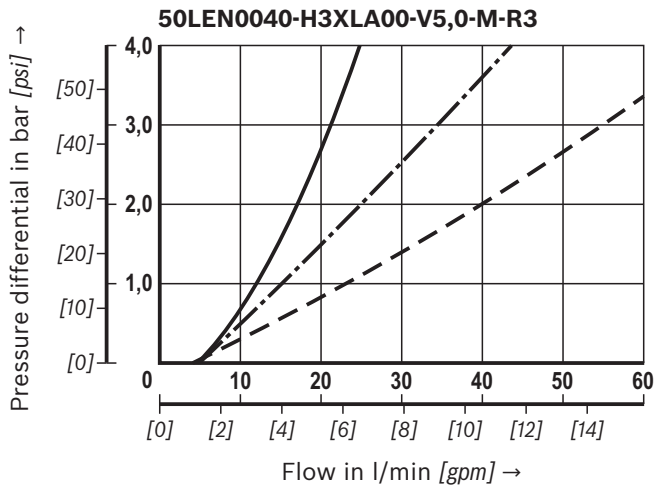



Characteristic curves H3XL; H10XL

(measured with mineral oil HLP46 according to DIN 51524 at $T = 40\text{ }^{\circ}\text{C}$) [$104\text{ }^{\circ}\text{F}$])



Spec. weight: $< 0.9\text{ kg/dm}^3$ Δp -Q-characteristic curves for complete filters recommended initial Δp for design = 1 bar [14.5 psi]

Oil viscosity:
 — 140 mm²/s [649 SUS]
 - · - 68 mm²/s [315 SUS]
 - - - 30 mm²/s [143 SUS]

H3XL

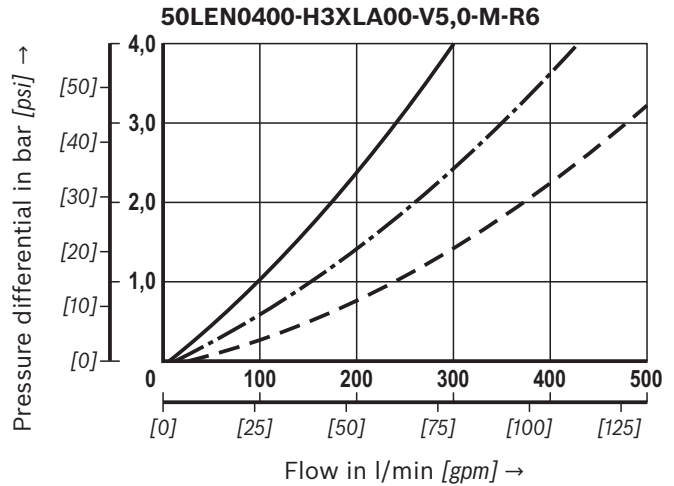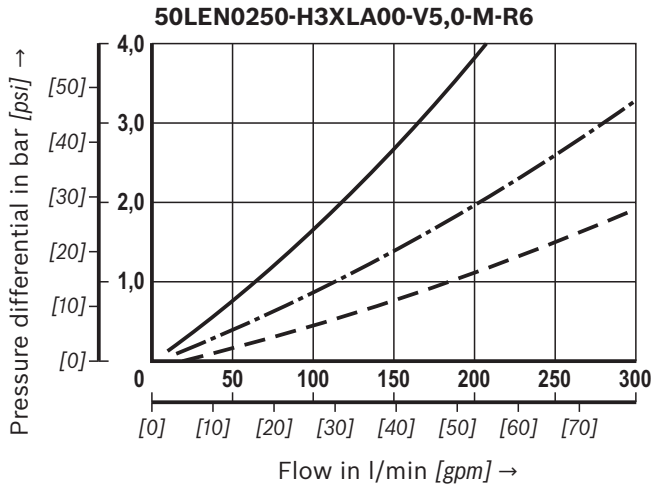

H10XL





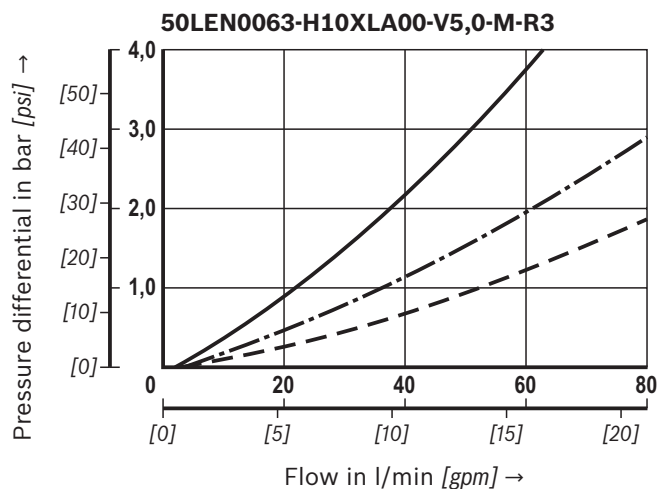
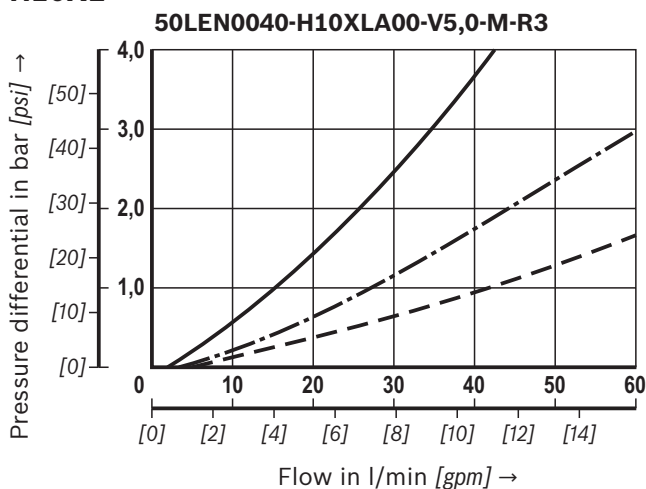


Characteristic curves H10XL

(measured with mineral oil HLP46 according to DIN 51524 at $T = 40\text{ }^{\circ}\text{C}$) [$104\text{ }^{\circ}\text{F}$])

Spec. weight: $< 0.9\text{ kg/dm}^3$ Δp -Q-characteristic curves for complete filters recommended initial Δp for design = 1 bar [14.5 psi]

Oil viscosity:
 — 140 mm²/s [649 SUS]
 - · - 68 mm²/s [315 SUS]
 - - - 30 mm²/s [143 SUS]

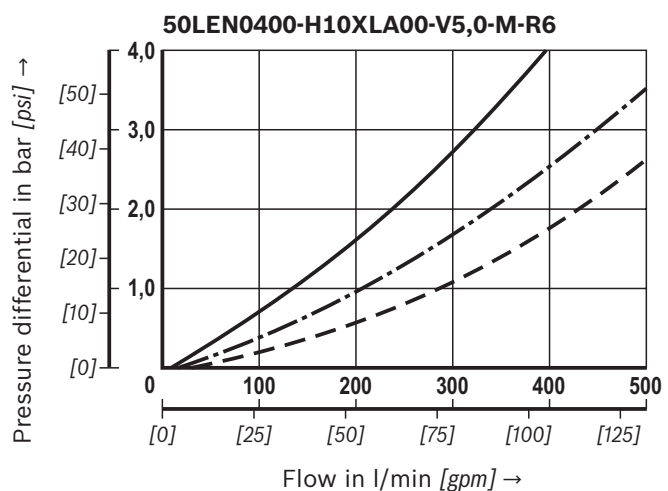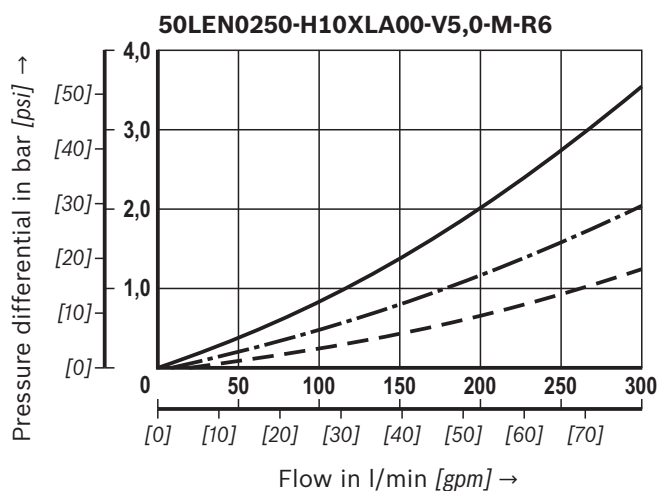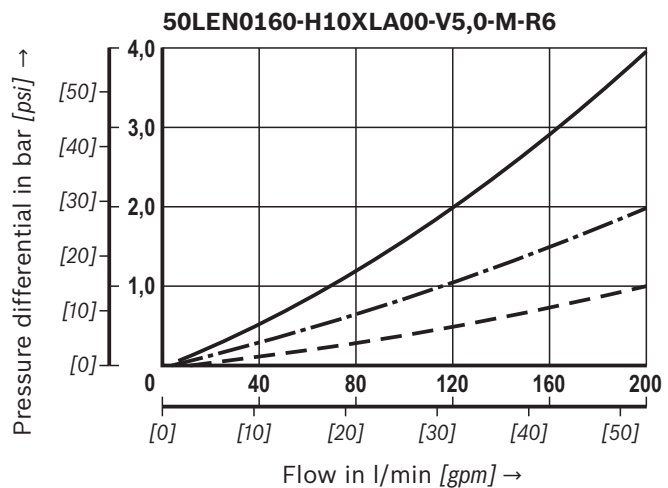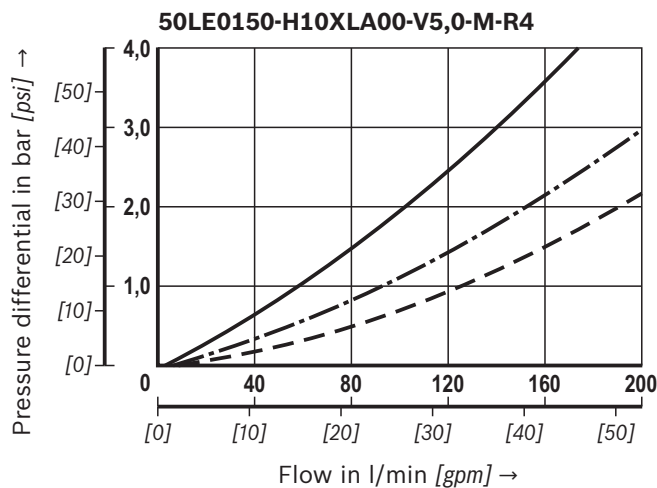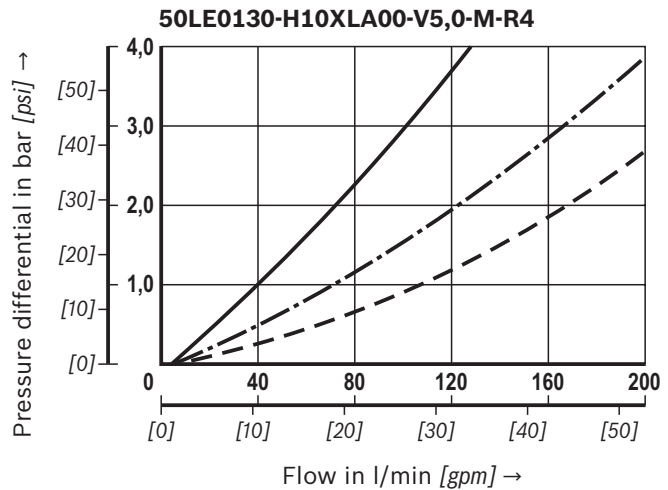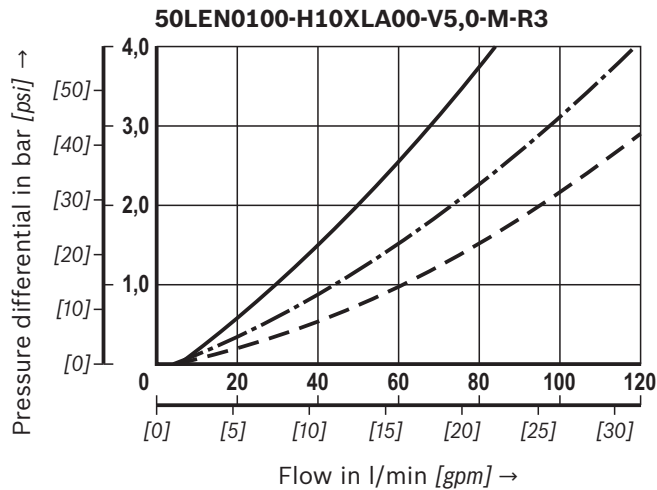

Dimensions: Size 0040 - size 0400

(dimensions in mm [inch])


Filter housing for filter elements according to DIN 24550 and according to standard

50 LEN 0040-0400

Type 50...	Content in l [US gal]	Weight in kg [lbs]	A1	A2	A3	A4
LEN 0040	0.27 [0.07]	1.05 [2.3]	209 [8.22]	87 [3.43]	164 [6.46]	24 [0.94]
LEN 0063	0.39 [0.1]	1.1 [2.4]	269 [10.59]		224 [8.82]	
LEN 0100	0.58 [0.15]	1.2 [2.6]	359 [14.13]		314 [12.36]	
LE 0130	0.89 [0.23]	1.91 [4.2]	299 [11.77]	98 [3.86]	251 [9.88]	30 [1.18]
LE 0150	1.1 [0.29]	2.06 [4.5]	350 [13.78]		302 [11.89]	
LEN 0160	1.31 [0.35]	3.1 [6.8]	310 [12.20]	122 [4.80]	255 [10.04]	35 [1.38]
LEN 0250	1.89 [0.50]	3.3 [7.3]	400 [15.75]		345 [13.58]	
LEN 0400	2.84 [0.75]	3.8 [8.4]	550 [21.65]		495 [19.49]	

Type 50...	A5	A6	B1	B2	B3	B4	ØB5
LEN 0040	139 [5.47]	80 [3.15]	92 [3.62]	27.5 [1.06]	37.5 [1.48]	10 [0.39]	75 [2.95]
LEN 0063							
LEN 0100							
LE 0130	150 [5.91]	140 [5.51]	122 [4.80]	40 [1.57]	50 [1.97]	14 [0.55]	105 [4.13]
LE 0150							
LEN 0160	174 [6.85]	140 [5.51]	142 [5.59]	50 [1.97]	60 [2.36]	20 [0.79]	125 [4.92]
LEN 0250							
LEN 0400							

Type 50...	ØB6	B7	B8	C1 con- nection	ØC2	ØC3	SW
LEN 0040	58 [2.28]	20 [0.79]	41 [1.61]	G 3/4 1 1/16-12 UN-2B	33 [1.30]	32 [1.26]	17 [0.67]
LEN 0063					41 [1.61]		
LEN 0100					41 [1.61]		
LE 0130	82 [3.23]	20 [0.79]	56 [2.20]	G 1 1 5/16-12 UN-2B	41 [1.61]	32 [1.26]	17 [0.67]
LE 0150					49 [1.93]		
LEN 0160	102 [4.02]	30 [1.18]	66 [2.60]	G 1 1/2 1 7/8-12 UN-2B	56 [2.20]		
LEN 0250					65 [2.56]		
LEN 0400					65 [2.56]		

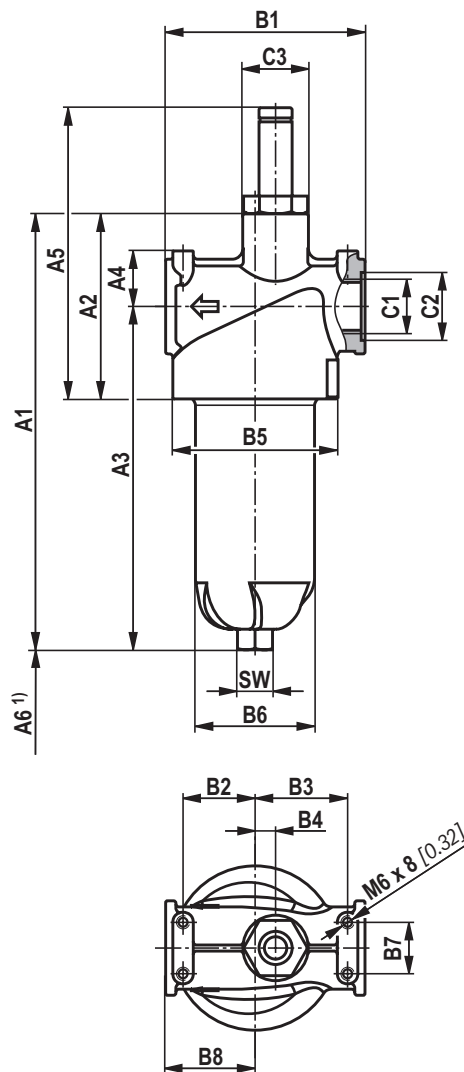


¹⁾ Servicing height for filter element exchange


Maintenance indicator

(dimensions in mm [inch])

Pressure differential indicator with mounted switching element M12 x 1

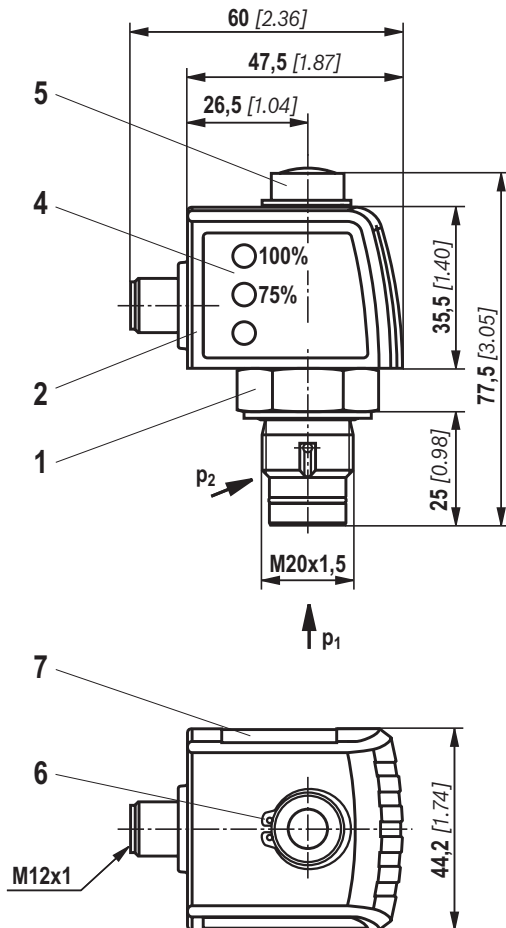

Pressure differential indicator with mounted switching element EN-175301-803

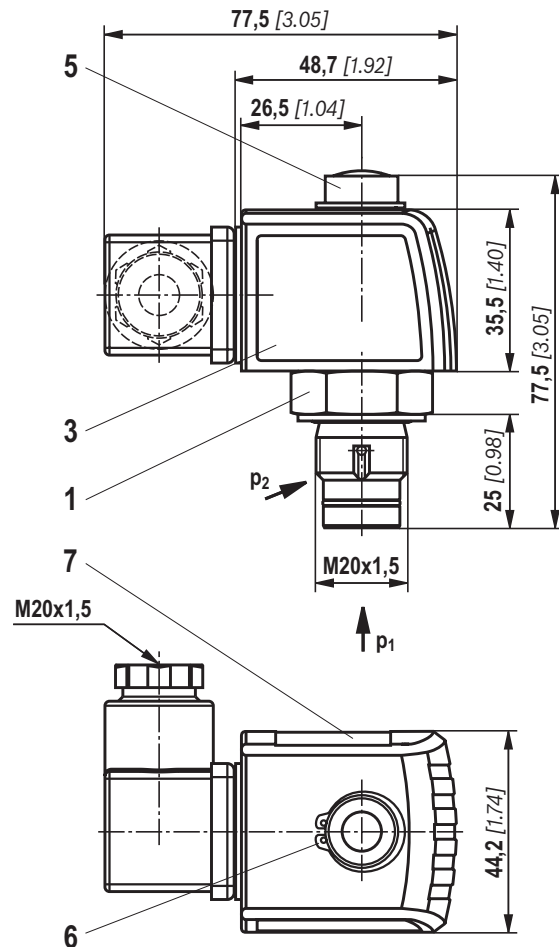

- 1 Mechanical optical maintenance indicator; max. tightening torque $M_{A \max} = 50 \text{ Nm}$ [36.88 lb-ft]
- 2 Switching element with locking ring for electrical maintenance indicator (rotatable by 360°); round plug-in connection M12 x 1, 4-pole
- 3 Switching element with locking ring for electrical maintenance indicator (rotatable by 360°); rectangular plug-in connection EN175301-803
- 4 Housing with three LEDs: 24 V =
green: Stand-by
yellow: Switching point 75%
red: Switching point 100%
- 5 Visual indicator bistable
- 6 Locking ring DIN 471-16 x 1
- 7 Name plate

Notices:

Representation contains mechanical optical maintenance indicator (1) and electronic switching element (2) (3). Switching elements with increased switching power upon request.

Ordering code spare parts

Filter element

01	02	03	04	05	06
2.			-	-	0

Filter element

01	Design	2.
----	--------	----

Nominal size

02	LEN... (Filter element according to DIN 24550)	0040 0063 0100 0160 0250 0400
	LE... (Filter elements according to standard)	0130 0150

Filter rating in μm

03	Nominal Stainless steel wire mesh, cleanable	G10 G25 G40 G60 G100
	Nominal Filter paper, not cleanable	P10 P25
	Absolute Non-woven glass fiber media, not cleanable (ISO 16889); $\beta_{x(c)} \geq 200$	H3XL H6XL H10XL H20XL

Pressure differential

04	max. admissible pressure differential of the filter element 30 bar [435 psi]	A00
	max. admissible pressure differential of the filter element 330 bar [4786 psi]	B00

Bypass valve

05	Always 0 with filter element	0
----	------------------------------	---

Seal

06	NBR seal	M
	FKM seal	V

Order example:

2.0100 H3XL-A00-0-M

For detailed information on filter elements please refer to data sheet.

Preferred program replacement filter element

Replacement filter element 3 micron	Replacement filter element 6 micron	Replacement filter element 10 micron
2.0040 H3XL-A00-0-M	2.0040 H6XL-A00-0-M	2.0040 H10XL-A00-0-M
2.0063 H3XL-A00-0-M	2.0063 H6XL-A00-0-M	2.0063 H10XL-A00-0-M
2.0100 H3XL-A00-0-M	2.0100 H6XL-A00-0-M	2.0100 H10XL-A00-0-M
2.0130 H3XL-A00-0-M	2.0130 H6XL-A00-0-M	2.0130 H10XL-A00-0-M
2.0150 H3XL-A00-0-M	2.0150 H6XL-A00-0-M	2.0150 H10XL-A00-0-M
2.0160 H3XL-A00-0-M	2.0160 H6XL-A00-0-M	2.0160 H10XL-A00-0-M
2.0250 H3XL-A00-0-M	2.0250 H6XL-A00-0-M	2.0250 H10XL-A00-0-M
2.0400 H3XL-A00-0-M	2.0400 H6XL-A00-0-M	2.0400 H10XL-A00-0-M

Ordering code spare parts

Mechanical optical maintenance indicator

01	02	03	04	05	06
W	O	-	D01	-	-

01	Maintenance indicator	W
02	Mechanical optical indicator	O

Design

03	Pressure differential, design 01	D01
----	----------------------------------	-----

Switching pressure

04	0.8 bar [12 psi]	0,8
	1.5 bar [22 psi]	1,5
	2.2 bar [32 psi]	2,2
	5.0 bar [72.5 psi]	5,0

Seal

05	NBR seal	M
	FKM seal	V

max. nominal pressure

06	Switching pressure 0.8 bar [11.6 psi], 160 bar [2321 psi]	160
	Switching pressure 1.5 bar [21.8 psi], 160 bar [2321 psi]	160
	Switching pressure 2.2 bar [31.9 psi], 160 bar [2321 psi]	160
	Switching pressure 5.0 bar [72.5 psi], 450 bar [6527 psi]	450

Mechanical optical maintenance indicator

Description
WO-D01-0.8-M-160
WO-D01-0.8-V-160
WO-D01-1.5-M-160
WO-D01-1.5-V-160
WO-D01-2.2-M-160
WO-D01-2.2-V-160
WO-D01-5,0-M-450
WO-D01-5,0-V-450

Ordering code spare parts

Seal kit

01	02	03	04
D	50/110LE		-

01	Seal kit	D
02	Series 50LE and 110LE	50/110LE

Nominal size

03	0040-0100	N0040-0100
	0130-0150	0130-0150
	0160-0400	N0160-0400

Seal

04	NBR seal	M
	FKM seal	V

Seal kit

Description
D50/110LEN0040-0100-M
D50/110LE0130-0150-M
D50/110LEN0160-0400-M
D50/110LEN0040-0100-V
D50/110LE0130-0150-V
D50/110LEN0160-0400-V

Assembly, commissioning, maintenance

Installation

The max. operating pressure of the system must not exceed the max. admissible operating pressure of the filter (see type plate).

During assembly of the filter (see also chapter “Tightening torque”), the flow direction (direction arrows) and the required servicing height of the filter element (see chapter “Dimensions”) are to be considered.

Easy filter element exchange is guaranteed in the installation position filter bowl vertically downwards. The maintenance indicator must be arranged in a well visible way.

Remove the plastic plugs in the filter inlet and outlet.

Ensure that the system is assembled without tension stress.

The optional electronic maintenance indicator is connected via the electronic switching element with 1 or 2 switching points, which is attached to the mechanical optical maintenance indicator and held by means of the locking ring.

Commissioning

Commission the system.

Notice:

There is no bleeding provided at the filter.

Maintenance

- ▶ If at operating temperature, the red indicator pin reaches out of the mechanical optical maintenance indicator and/or if the switching process in the electronic switching element is triggered, the filter element is contaminated and needs to be replaced and cleaned respectively.

WARNINGS!

- ▶ Assembly and disassembly only with depressurized system!
- ▶ Tank is under pressure!
- ▶ Maintenance only be specialists.
- ▶ Remove the filter bowl only if it is not under pressure!
- ▶ Do not exchange the maintenance indicator while the filter is under pressure!

- ▶ The material number of the corresponding replacement filter element is indicated on the name plate of the complete filter. It must comply with the material number on the filter element.
- ▶ Decommission the system.
- ▶ The operating pressure is to be built up on the system side.

Notice:

There is no bleeding provided at the filter.

- ▶ Via the drain screw (from size 0160 fitted by default), the oil on the dirt side can be drained.
- ▶ Screw off the filter bowl.
- ▶ Remove the filter element from the spigot by rotating it slightly.
- ▶ Clean the filter components, if necessary.
- ▶ Check the seals at the filter bowl for damage and renew them, if necessary.
For suitable seal kits refer to chapter “Spare parts”.
- ▶ Filter elements made of wire mesh can be cleaned. The efficiency of the cleaning process depends on the type of dirt and the amount of the pressure differential before the filter element exchange.
If the pressure differential after the filter element exchange exceeds 150% of the value of a brand-new filter element, the filter element made of wire mesh (G...) also needs to be replaced. For detailed cleaning instructions refer to data sheet.
- ▶ Install the new or cleaned filter element on the spigot again by slightly rotating it.
- ▶ The filter is to be assembled in reverse order.
- ▶ The torque specifications (“Tightening torques” chapter) are to be observed.
- ▶ Commission the system.

- ▶ Functional and safety warranty only applicable when using genuine spare parts!
- ▶ Warranty becomes void if the delivered item is changed by the ordering party or third parties or improperly mounted, installed, maintained, repaired, used or exposed to environmental condition that do not comply with the installation conditions.

Tightening torques

(dimensions in mm [inch])

Mounting

Series 50 ...	LEN0040	LEN0063	LEN0100	LE0130	LE0150	LEN0160	LEN02	LEN0400
Screw/tightening torque with $\mu_{\text{total}} = 0.14$	M6/4.5 Nm \pm 10 %							
Quantity	4							
Recommended property class of screw	8.8							
Minimum screw-in depth	6 mm + 1 mm							

Filter bowl and maintenance indicator

Series 50 ...	LEN0040	LEN0063	LEN0100	LE0130	LE0150	LEN0160	LEN02	LEN0400
Tightening torque filter bowl	50 Nm + 10 Nm							
Tightening torque maintenance indicator	50 Nm							
Tightening torque cubic connector screw switch-element EN-175301-803	M3/0.5 Nm							

Directives and standardization

Classification according to the Pressure Equipment Directive

The inline filters for hydraulic applications according to are pressure holding equipment according to article 1, section 2.1.4 of the Pressure Equipment Directive 97/23/EC (PED).

However, on the basis of the exception in article 1, section 3.6 of the PEG, hydraulic filters are exempt from the PED if they are not classified higher than category I (guideline 1/19). They do not receive a CE mark.

Use in potentially explosive areas according to directive 94/9/EC (ATEX)

The inline filters according to are no equipment or components in the sense of directive 94/9/EC and are not provided with a CE mark. It has been proven with the ignition risk analysis that these inline filters do not have own ignition sources acc. to DIN EN 13463-1:2009.

According to DIN EN 60079-11:2012, the electronic maintenance indicators WE-1SP-M12x1 and WE-1SP-EN175301-803 are simple, electronic operating equipment not having an own voltage source. This simple, electronic operating equipment may - according to DIN

EN 60079-14:2008 - in intrinsically safe electric circuits (Ex ib) be used in systems without marking and certification.

The inline filters and the electronic maintenance indicators described here can be used for the following potentially explosive areas:


	zone suitability	
Gas	1	2
Dust	21	22

Directives and standardization

Complete filter with mech./opt. Maintenance indicator				
Use /assignment			Gas 2G	Dust 2D
Assignment			Ex II 2G c IIC TX	Ex II 2D c IIC TX
Conductivity of the medium	pS/m	min	300	
Dust accumulation		max	–	0.5 mm

Electronic switching element in the intrinsically safe electric circuit				
Use /assignment			Gas 2G	Dust 2D
Assignment			Ex II 2G Ex ib IIB T4 Gb	Ex II 2D Ex ib IIIC T100 °C Db
Perm. intrinsically safe electric circuits			Ex ib IIC, Ex ic IIC	Ex ib IIIC
Technical data			Values only for intrinsically safe electric circuit	
Switching voltage	Ui	max	150 V AC/DC	
Switching current	Ii	max	1.0 A	
Switching power	Pi	max	1.3 W T4 T _{max} 40 °C	750 mW T _{max} 40 °C
		max	1.0 W T4 T _{max} 80 °C	550 mW T _{max} 100 °C
Surface temperature ¹⁾		max	–	100 °C
Inner capacity	Ci		negligible	
Inner inductivity	Li		negligible	
Dust accumulation		max	–	0.5 mm

Possible circuit according to DIN EN 60079-14

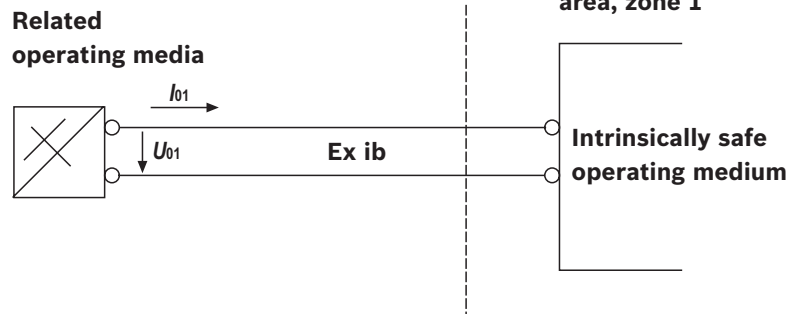

⚠ WARNING!

- Explosion hazard due to high temperature! The temperature depends on the temperature of the medium in the hydraulic circuit and must not exceed the value specified here. Measures are to be taken so that in the potentially explosive area, the max. admissible ignition temperature is not exceeded.
- When using the inline filters in accordance with 51447 in potentially explosive areas, appropriate equipotential bonding has to be ensured. The filter is preferably to be earthed via the mounting screws. It has to be

noted in this connection that paintings and oxidic protective layers are not electrically conductive.

- Maintenance only by specialists, instruction by the machine end-user acc. to DIRECTIVE 1999/92/EC appendix II, section 1.1
- During filter element exchanges, the packaging material is to be removed from the replacement element outside the potentially explosive area
- Functional and safety warranty only applicable when using genuine spare parts