



Block mounting filter, lateral flange- mounting possible

**Types 250/450 FEN 0040 to 1000;
250/450 FE 0003, 0015, 0018**

- Nominal sizes **according to DIN 24550**: 0040 to 1000
- Nominal sizes according to BRFs: 0003, 0015, 0018
- Nominal pressures 250, 450 bar
- Connections up to SAE 2 1/2"
- Operating temperature -10 °C to +100 °C

Application

- Filtration of pressure fluids and lubricants.
- Filtration of fluids and gases.
- Direct installation into pipelines.
- Direct wear protection of downstream components and systems.

Features

- Flow-optimized design due to 3D computer-supported design.
- Low pressure drop.
- Special highly efficient filter media

Design

Filter head with inlet, outlet and filter element centering spigot. Filter bowl is unscrewed downwards.

Materials: See spare parts list in this brochure.

Further design variants available on request.

Filter element

Pleated design with optimized pleat density and various filter media.

The filter element is the most important component of the "FILTER" system in view of the prolonged life and the wear protection of the systems.

The most important criteria for selection are the required degree of cleanliness of the operating medium, the initial pressure differential and the contamination retention capacity.

For further detailed information please refer to our brochure "Filter Elements".

Accessories

Clogging indicator

Basically, the filter is equipped with mechanical optical clogging indicator. The electronic clogging indicator is connected via the electronic switching element with 1 or 2 switching points, which has to be ordered separately. The electronic switching element is attached to the mechanical optical clogging indicator and held by means of a locking ring.

Quality and standardization

The development, manufacture, and assembly of BRFS industrial filters and BRFS filter elements is carried out within the framework of a certified quality management system in accordance with ISO 9001:2000.

The pressure filters for hydraulic applications according to are pressure holding equipment according to article 1, section 2.1.4 of the pressure equipment directive 97/23/EC (DGRL). However, on the basis of the exception in article 1, section 3.6 of the DGRL, hydraulic filters are exempt from the DGRL if they are not classified higher than category I (guideline 1/19). They do not receive a CE mark.

Ordering details

of the filter

Pressure

250 bar = 250
450 bar = 450

Design

Flange filter with filter element according to DIN 24550 = FEN
Flange filter with filter element according to BRFS standard = FE

Nom. size

FEN... = 0040 0063 0100 0160
0250 0400 0630 1000
FE... = 0003 ¹⁾ 0015 0018

Filtration rating in µm

nominal

Stainless steel wire mesh, cleanable: G10, G25 = G...
Paper, non-cleanable = P...
P10 = P...

absolute (ISO 16889)

Micro glass, non-cleanable H3XL, H10XL, H20XL = H...XL

Pressure differential

Max. admissible pressure differential of the filter element 330 bar = B

Element model

Standard adhesive T = 100 °C = 0...
Standard material = ...0
chemically nickel-plated = ...D ²⁾

Solenoid

without = 0

Complementary details

0 = without
Z ³⁾ = Certificate

Material

0 = Standard

Seal

M = NBR seal
V = FKM seal

Connection

00 = Standard

Clogging indicator

V5,0 = clogging indicator, optical state switching pressure 5.0 bar

Bypass valve

0 = without

Ordering example:

450 FEN 0063 H10XL-B00-00V5,0-00M00

of the filter element

Filter element

Design = 2.

Nom. size

FEN... = 0040 0063 0100 0160
0250 0400 0630 1000
FE... = 0004 ¹⁾ 0015 0018

Filtration rating in µm

nominal

Stainless steel wire mesh, cleanable: G10, G25 = G...
Paper, non-cleanable: P10 = P...

absolute (ISO 16889)

Micro glass, non-cleanable: H3XL, H10XL, H20XL = H...XL

Pressure differential

Max. admissible pressure differential of the filter element 330 bar = B

Seal

M = NBR seal
V = FKM seal

Bypass valve

0 = without

Element model

0... = Standard adhesive T = 100 °C
...0 = Standard material
...D ²⁾ = chemically nickel-plated

Ordering example:

2.0063 H10XL-B00-0-M

¹⁾ For filter element 2.0004

²⁾ Only in connection with FKM seal

³⁾ Manufacturer's inspection certificate M according to DIN 55350 T18

Preferred types

Line filter with lateral flange-mounting possibility, without bypass, filtration rating 10 µm and nominal pressure 250 bar

Type	Flow in L/min at $v = 30 \text{ mm}^2/\text{s}$ and $\Delta p = 1 \text{ bar}$
250 FE 0003 H10XL-B00-00V5,0-00M00	43
250 FEN 0040 H10XL-B00-00V5,0-00M00	49
250 FEN 0063 H10XL-B00-00V5,0-00M00	70
250 FEN 0100 H10XL-B00-00V5,0-00M00	90
250 FE 0015 H10XL-B00-00V5,0-00M00	153
250 FE 0018 H10XL-B00-00V5,0-00M00	175
250 FEN 0160 H10XL-B00-00V5,0-00M00	215
250 FEN 0250 H10XL-B00-00V5,0-00M00	258
250 FEN 0400 H10XL-B00-00V5,0-00M00	330

Line filter with lateral flange-mounting possibility, without bypass, filtration rating 3 µm and nominal pressure 250 bar

Type	Flow in L/min at $v = 30 \text{ mm}^2/\text{s}$ and $\Delta p = 1 \text{ bar}$
250 FE 0003 H3XL-B00-00V5,0-00M00	18
250 FEN 0040 H3XL-B00-00V5,0-00M00	21
250 FEN 0063 H3XL-B00-00V5,0-00M00	33
250 FEN 0100 H3XL-B00-00V5,0-00M00	50
250 FE 0015 H3XL-B00-00V5,0-00M00	74
250 FE 0018 H3XL-B00-00V5,0-00M00	95
250 FEN 0160 H3XL-B00-00V5,0-00M00	115
250 FEN 0250 H3XL-B00-00V5,0-00M00	160
250 FEN 0400 H3XL-B00-00V5,0-00M00	230

Line filter with lateral flange-mounting possibility, without bypass, filtration rating 10 µm and nominal pressure 450 bar

Type	Flow in L/min at $v = 30 \text{ mm}^2/\text{s}$ and $\Delta p = 1 \text{ bar}$
450 FE 0003 H10XL-B00-00V5,0-00M00	43
450 FEN 0040 H10XL-B00-00V5,0-00M00	49
450 FEN 0063 H10XL-B00-00V5,0-00M00	70
450 FEN 0100 H10XL-B00-00V5,0-00M00	90
450 FE 0015 H10XL-B00-00V5,0-00M00	153
450 FE 0018 H10XL-B00-00V5,0-00M00	175
450 FEN 0160 H10XL-B00-00V5,0-00M00	215
450 FEN 0250 H10XL-B00-00V5,0-00M00	258
450 FEN 0400 H10XL-B00-00V5,0-00M00	330
450 FEN 0630 H10XL-B00-00V5,0-00M00	495
450 FEN 1000 H10XL-B00-00V5,0-00M00	610

Preferred types

Line filter with lateral flange-mounting possibility, without bypass, filtration rating 3 µm and nominal pressure 450 bar

Type	Flow in L/min
	at $v = 30 \text{ mm}^2/\text{s}$ and $\Delta p = 1 \text{ bar}$
450 FE 0003 H3XL-B00-00V5,0-00M00	18
450 FEN 0040 H3XL-B00-00V5,0-00M00	21
450 FEN 0063 H3XL-B00-00V5,0-00M00	33
450 FEN 0100 H3XL-B00-00V5,0-00M00	50
450 FE 0015 H3XL-B00-00V5,0-00M00	74
450 FE 0018 H3XL-B00-00V5,0-00M00	95
450 FEN 0160 H3XL-B00-00V5,0-00M00	115
450 FEN 0250 H3XL-B00-00V5,0-00M00	160
450 FEN 0400 H3XL-B00-00V5,0-00M00	230
450 FEN 0630 H3XL-B00-00V5,0-00M00	290
450 FEN 1000 H3XL-B00-00V5,0-00M00	400

Ordering details: electronic switching element for clogging indicator

	ABZ	F	V	-	1X	/	-	DIN	
power unit accessories									-DIN = Identification for DIN and SAE models
Filter									
Clogging indicator									Unit series
electronic switching element with 1 switching point (changeover) round plug-in connection M12x1									unit series 10 to 19 (10 to 19; unchanged installation and connection dimensions)
electronic switching element with 2 switching points (normally open/normally closed), 75%, 100%, round plug-in connection M12x1, 3 LED									= E1SP-M12X1
electronic switching element with 2 switching points (normally open/normally closed), 75%, 100%, signal suppression until 30 °C round plug-in connection M12x1, 3 LED									= E2SP-M12X1 = E2SPSU-M12X1

Electronic switching element

ABZ FV-E1SP-M12X1-1X/-DIN

ABZ FV-E2SP-M12X1-1X/-DIN

ABZ FV-E2SPSU-M12X1-1X/-DIN

Ordering example: Pressure filter with mechanical optical clogging indicator for $p_{nom.} = 450 \text{ bar}$ [6530 psi] with bypass valve, nominal size 63, with filter element $10 \mu\text{m}$ and electronic switching element M12x1 with 1 switching point for pressure liquid mineral oil HLP according to DIN 51524.


Filter: 450 FEN 0063 H10XL-B00-00V5,0-00M00

Clogging indicator: ABZ FV-E1SP-M12X1-1X/-DIN

Plug-in connectors according to IEC 60947-5-2 (dimensions in mm [inch])

for electronic switching element with round plug-in connection M12 x 1

**Plug-in connector for K24 4-pin, M12 x 1
with screwed connection, cable fitting Pg9.**

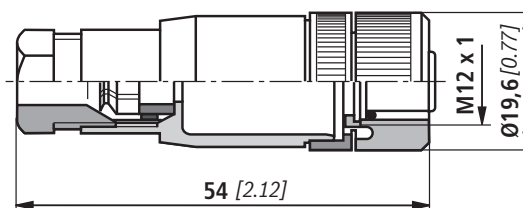


**Plug-in connector for K24-3m 4-pin, M12 x 1
with molded in PVC cable, 3 m long.**

Line cross-section: 4 x 0.34 mm²

Core marking:


1	brown
2	white
3	blue
4	black

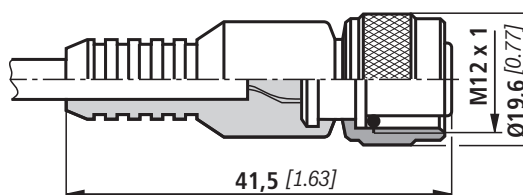




For additional round plug-in connections, see data sheet.

Symbols

Pressure filter
without bypass, with
mechanical display



Electronic switching element for
clogging indicator

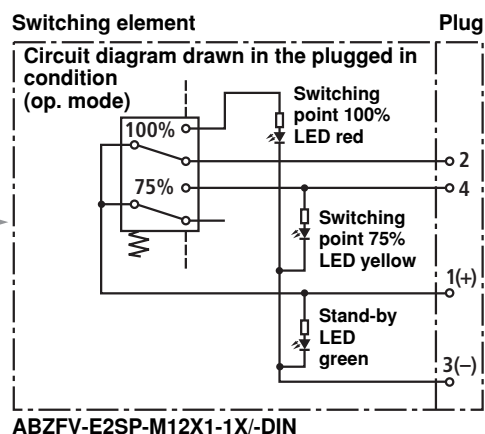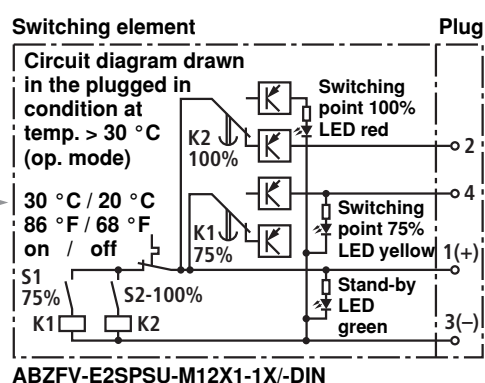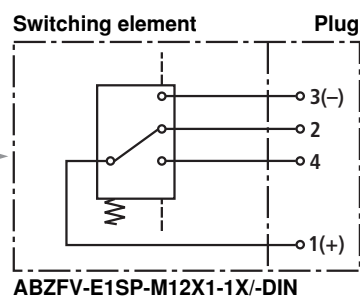

Technical data (for applications outside these parameters, please consult us!)

Electronic (electric switching element)

Electrical connection		Round plug-in connection M12 x 1, 4-pin
Contact load, direct voltage	A	Max. 1
Voltage range	E1SP-M12x1 V DC/AC	Max. 150
	E2SP V DC	10 to 30
Max. switching capacity with ohmic loads		20 VA; 20 W; (70 VA)
Switching type	E1SP-M12x1	Changeover
	E2SP-M12x1	Normally open at 75% of the response pressure, Normally closed at 100% of the response pressure
	E2SPSU-M12x1	Normally open at 75% of the response pressure, Normally closed at 100% of the response pressure Signal switching through at 30 °C [86 °F], Return switching at 20 °C [68 °F]
Display via LEDs in the electronic switching element E2SP...		Stand-by (LED green); 75% switching point (LED yellow) 100% switching point (LED red)
Type of protection according to EN 60529		IP 65
For direct voltage above 24 V a spark suppression is to be provided to protect the switching contacts.		
Weight	electronic switching element: – with round plug-in connection M12 x 1	kg [lbs]
		0.1 [0.22]

Characteristic curves







Specific weight: $< 0.9 \text{ kg/dm}^3$

Δp -Q characteristic curves for complete filters recommended
 initial Δp for design = 1 bar

H3XL...

Oil viscosity:

— 120 mm²/s
 - · - 46 mm²/s
 - - - 30 mm²/s

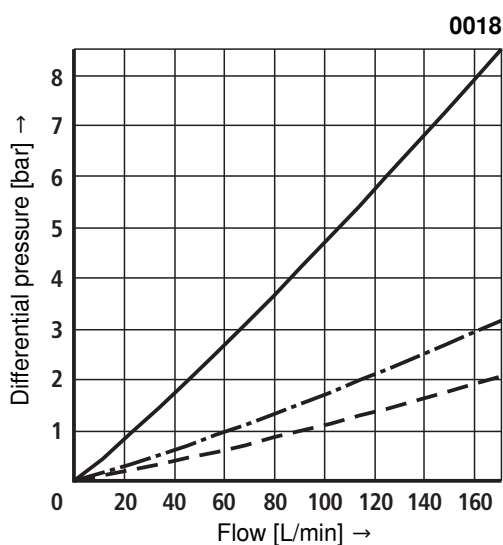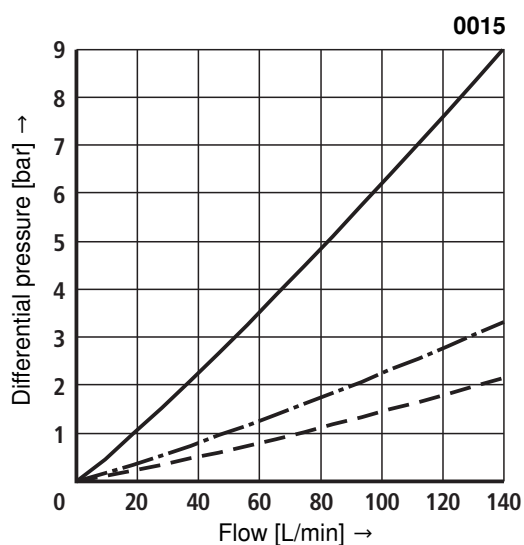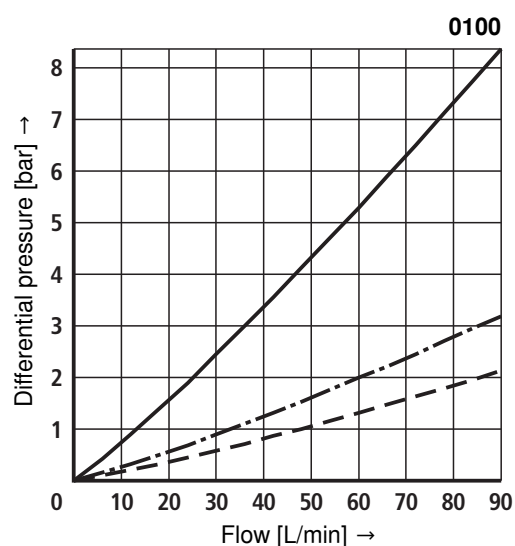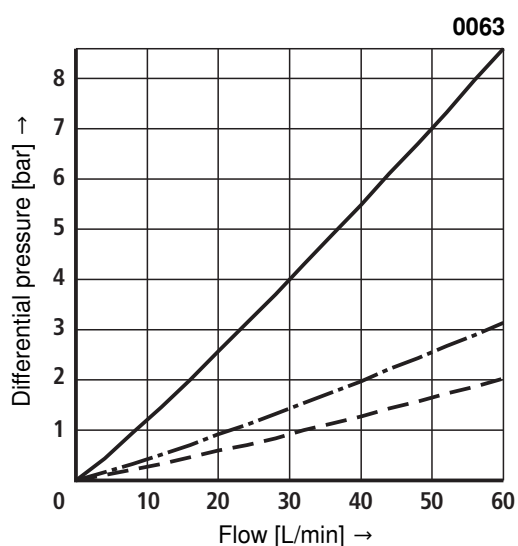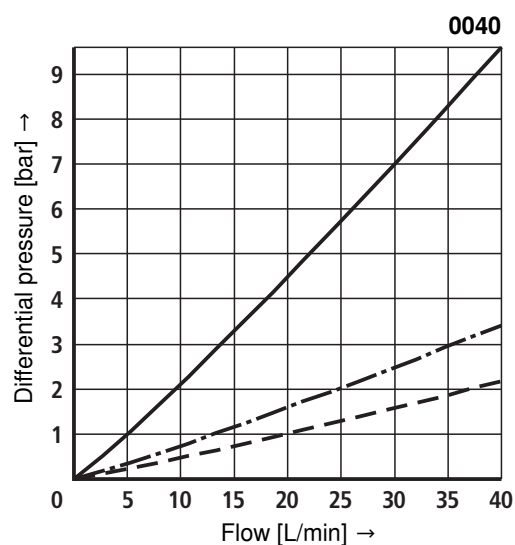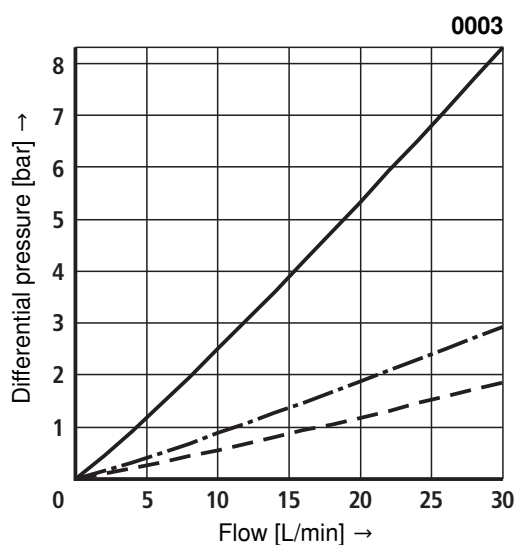

Characteristic curves

Specific weight: $< 0.9 \text{ kg/dm}^3$






Δp -Q characteristic curves for complete filters recommended

initial Δp for design = 1 bar

H3XL...

Oil viscosity:

— 120 mm²/s
 - · - 46 mm²/s
 --- 30 mm²/s

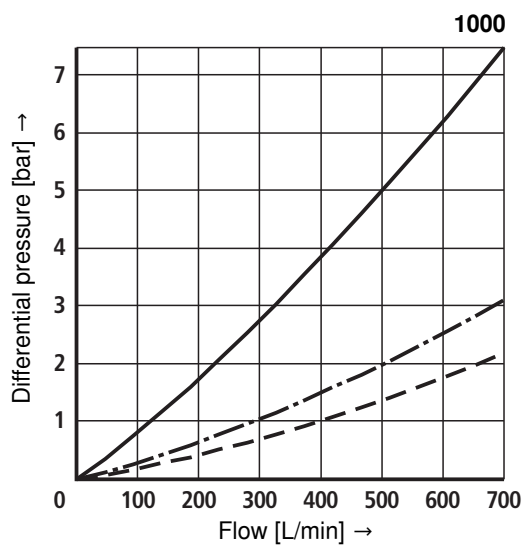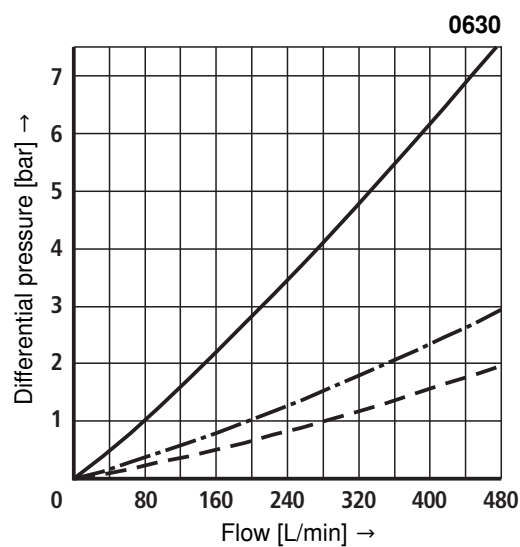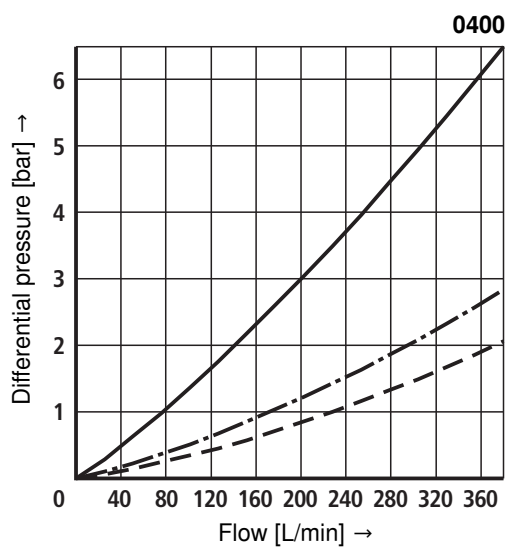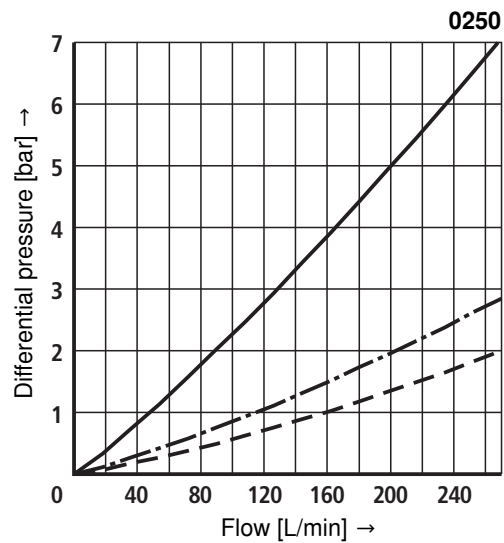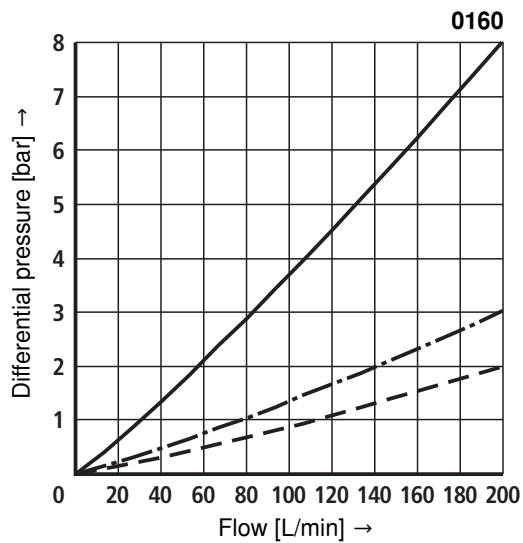

Characteristic curves







Specific weight: $< 0.9 \text{ kg/dm}^3$

Δp -Q characteristic curves for complete filters recommended
 initial Δp for design = 1 bar

H10XL...

Oil viscosity:

— 120 mm²/s
 - · - 46 mm²/s
 --- 30 mm²/s

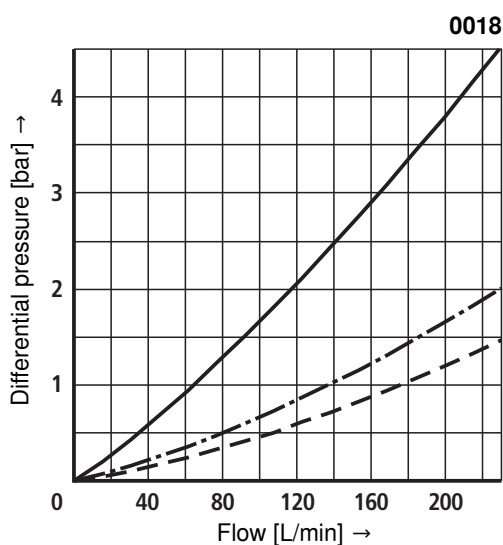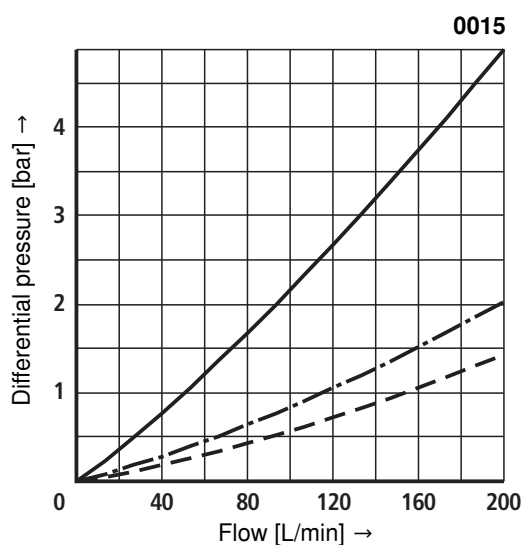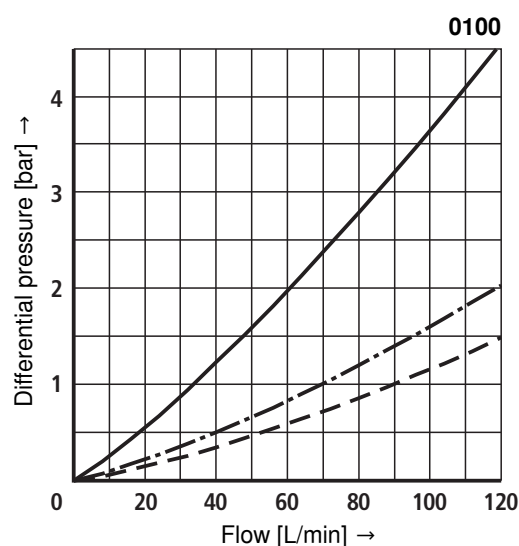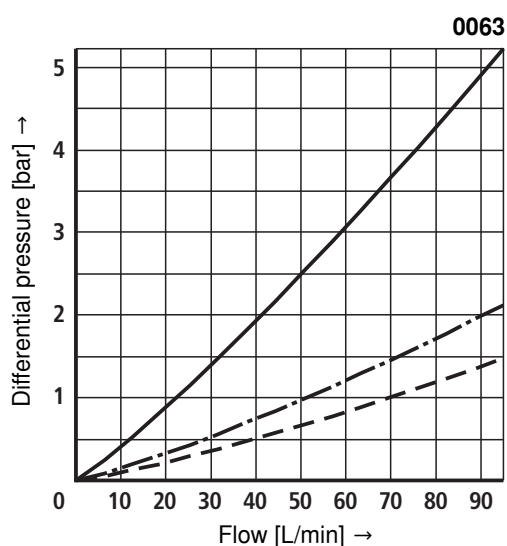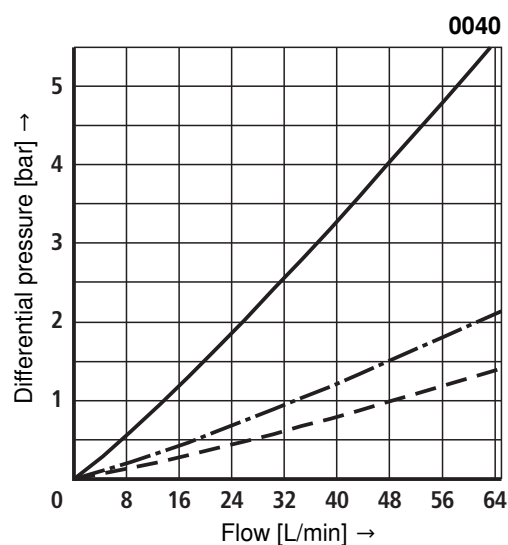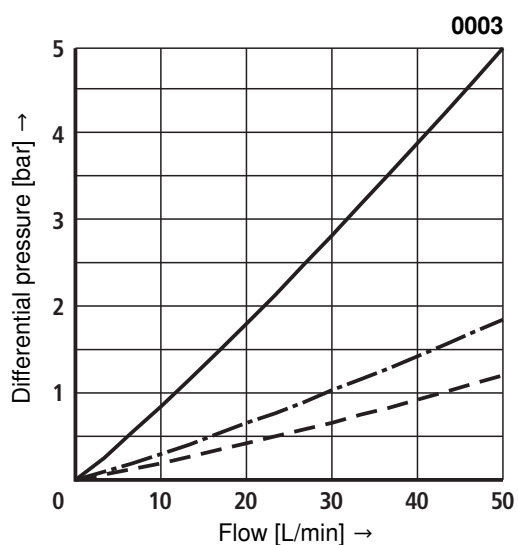

Characteristic curves

Specific weight: $< 0.9 \text{ kg/dm}^3$






Δp -Q characteristic curves for complete filters recommended

initial Δp for design = 1 bar


H10XL...

Oil viscosity:

— 120 mm²/s
 - - 46 mm²/s
 - - - 30 mm²/s

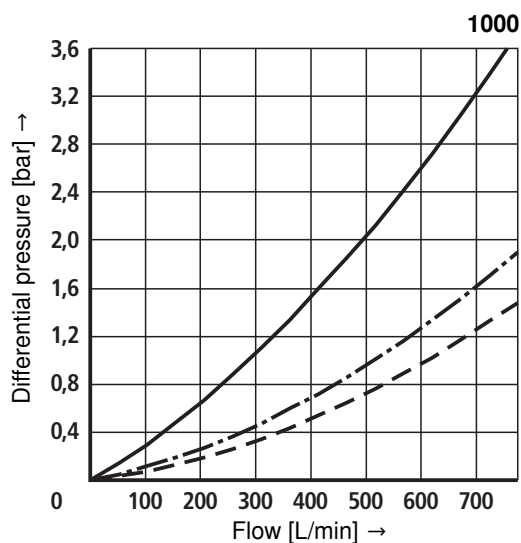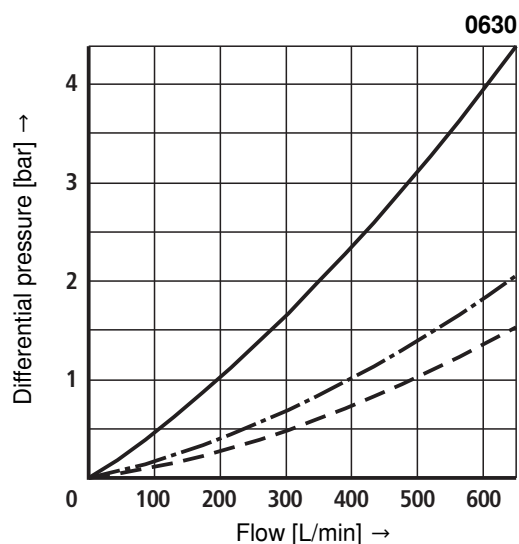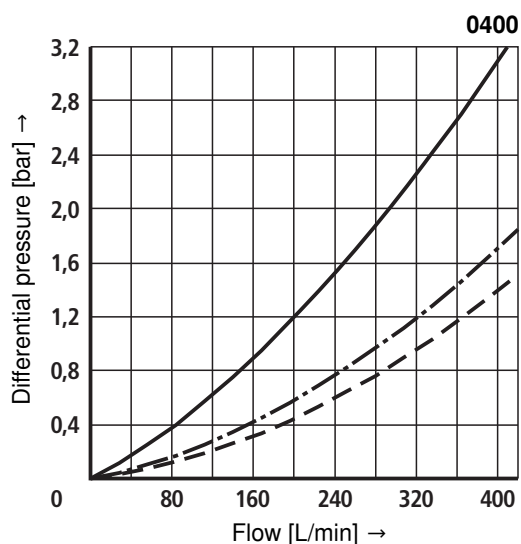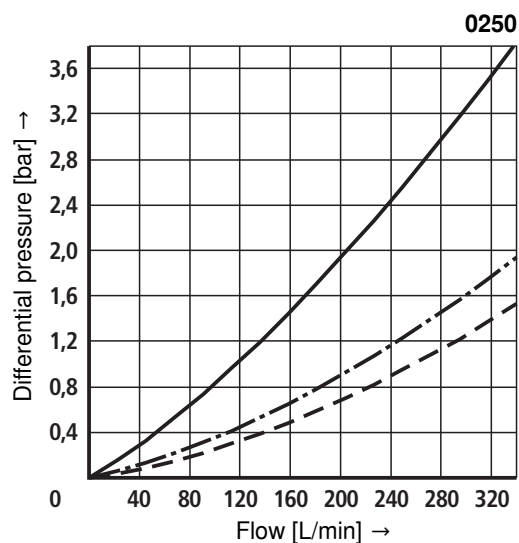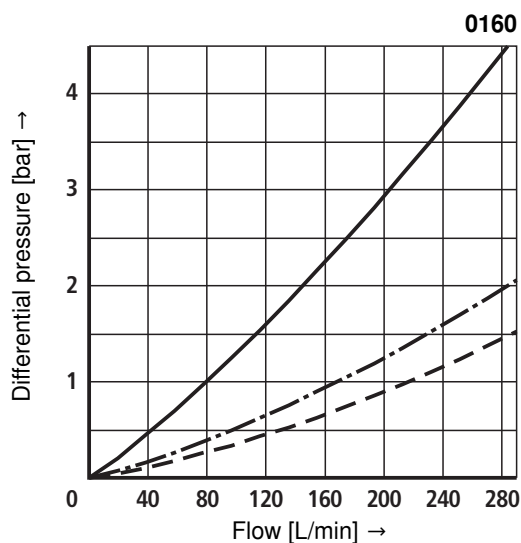

Unit dimensions (dimensions in mm)

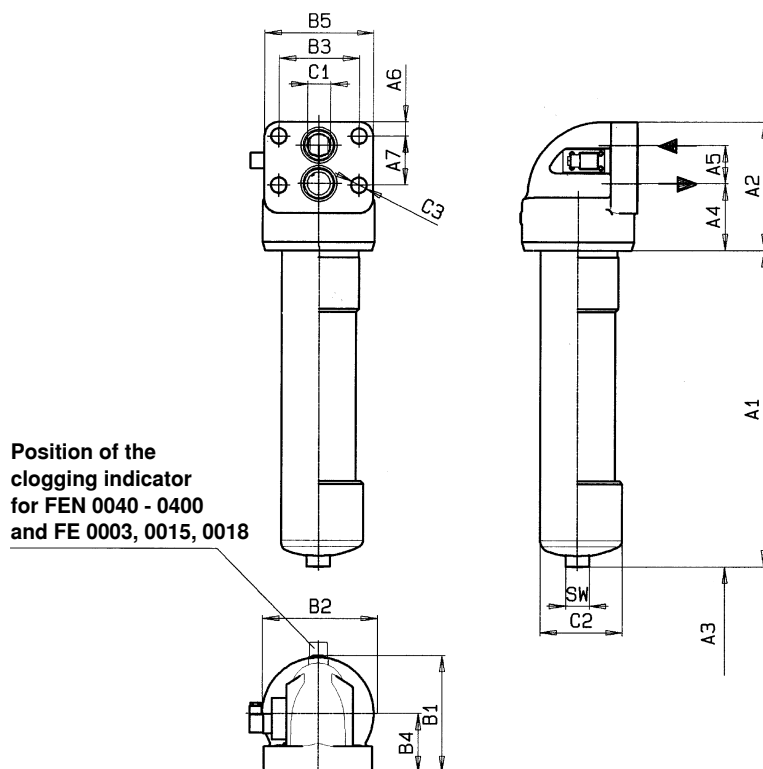

Filter housing for filter elements in accordance with DIN 24550

Type	Content in L	Weight in kg ¹⁾	A1	A2	A3 ²⁾	A4	A5	A6	A7	B1	B2	B3	B4	B5	C1	C2	C3	SW
250/450 FEN 0040	0.2	4.6	98	112	110	56	28	12	45	95	88	57	48	80	Ø 14	Ø 64	Ø 14	24
250/450 FEN 0063	0.3	5.9	161															
250/450 FEN 0100	0.5	6.1	251															
250/450 FEN 0160	1.3	16.5	167	160	150	79.5	52	22.5	60	156	150	95	80	140	Ø 32	Ø 114	Ø 23	32
250/450 FEN 0250	1.9	19.2	257															
250/450 FEN 0400	3.0	24.1	407															
450 FEN 0630	4.5	47.5	421	225		117	67	25	86	199	195	140	99	190	Ø 50	Ø 140	Ø 27	41
450 FEN 1000	6.2	67.5	641													Ø 160		


Filter housing for filter elements according to BRFS standard

Type 250/450 FE...	Content in L	Weight in kg ¹⁾	A1	A2	A3 ²⁾	A4	A5	A6	A7	B1	B2	B3	B4	B5	C1	C2	C3	SW
0003	0.2	4.6	98	112	100	56	28	12	45	95	88	57	48	80	Ø 14	Ø 64	Ø 14	24
0015	0.9	11.0	188	150	130	80	35	20	55	130	125	72	65	110	Ø 18	Ø 92	Ø 18	32
0018	1.1	12.7	239															

¹⁾ Weight including standard filter element and clogging indicator.

²⁾ Withdrawal dimension for filter element replacement.

Spare parts list

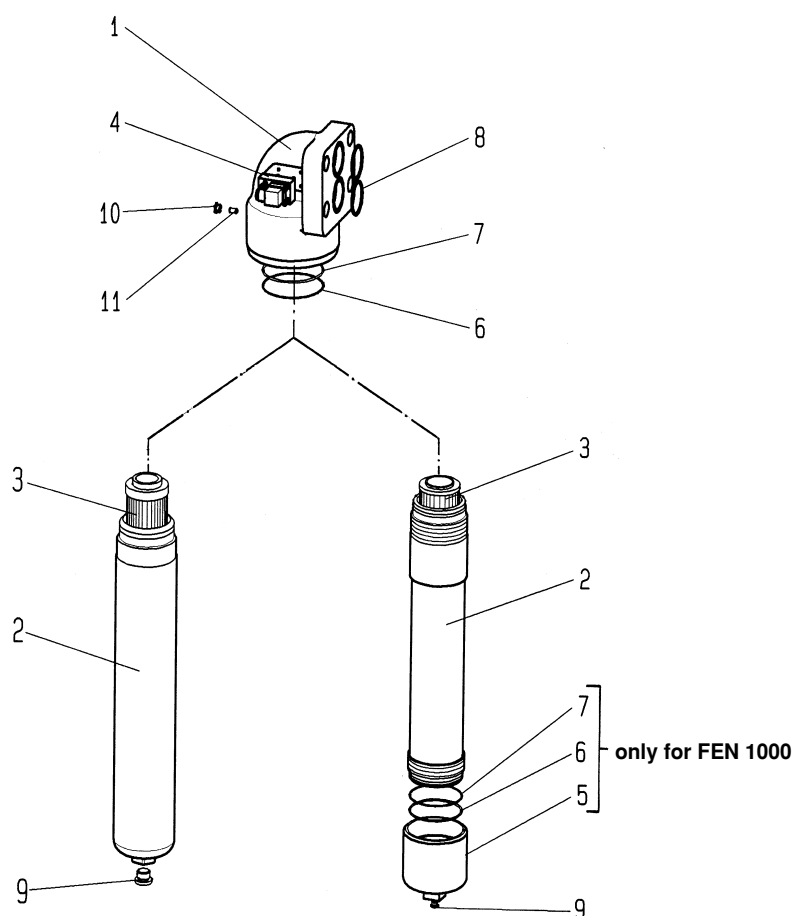

		Size FEN			0040	0063	0100			0160	0250	0400	0630	1000
		Size FE		0003				0015	0018					
Part	Piece	Description	Material											
1	1	Filter head	GGG50	Please indicate ordering information "Filter"										
2	1	Filter bowl	Steel	Please indicate ordering information "Filter"										
3	1	Filter element	various	Please indicate ordering information "Filter Element"										
3.1	1	Seal ring	NBR / FKM	Please indicate ordering information "Filter"										
4	1	Clogging indicator	various	See ordering information "Clogging indicator"										
5	1	Bottom	Steel	-										Part No. 4374
6	2	Support ring	PTFE	Please indicate ordering information "Filter"										
7	2	Seal ring	NBR / FKM	Please indicate ordering information "Filter"										
8	2	Seal ring	NBR / FKM	Please indicate ordering information "Filter"										
9	1	Plug	Steel	Part No. 778										
10	1	Plug	Steel	-										Part No. 771
11	1	Set screw with hexagon socket	5.8	-										Part No. 4371

All part numbers BRFS specific.

Spare parts (insert for DIN and SAE filters)

Mechanical optical clogging indicator

power unit accessories

Filter

Clogging indicator

Mechanical optical clogging indicator for high-pressure filters

Switching point 5 bar [72 psi]

ABZ F V – HV5 – 1X/ – DIN

DIN =

Identification for DIN and SAE models

Sealing material

see table below

see table below

Unit series

unit series 10 to 19

(10 to 19; unchanged installation and connection dimensions)

M =

V =

1X =

= HV5

Mechanical optical clogging indicator

ABZ FV-HV5-1X/M-DIN

The ordering details for filter elements can be found on page 3.

Sealing kits must be ordered by stating the complete part key.

Sealing material and surface coating for pressure fluids

		Ordering details	
Mineral oils		Sealing material	Element model
Mineral oil	HLP according to DIN 51524	M	...0
Fire-resistant hydraulic fluids			
Emulsions	HFA-E according to DIN 24320	M	...0
Synthetic water solutions	HFA-S according to DIN 24320	M	...D
Water solutions	HFC according to VDMA 24317	M	...D
Phosphate esters	HFD-R according to VDMA 24317	V	...D
Organic esters	HFD-U according to VDMA 24317	V	...D
Hydraulic fluids that are fast biodegradable			
Triglycerides (rape seed oil)	HETG according to VDMA 24568	M	...D
Synthetic esters	HEES according to VDMA 24568	V	...D
Polyglycoles	HEPG according to VDMA 24568	V	...D

Installation, commissioning and maintenance

Installation

Verify operating pressure with name plate information.

Remove the plugs from the filter inlet and outlets. Fit the filter into the pipe work, ensuring that it is fitted free of tension and considering the flow direction (direction arrows) and the withdrawal height of the filter element (pos.3).

Warning!

Assemble and disassemble the filter only when system is depressurized!

Vessel is under pressure!

When disassembling the filter, please note that the filter inlet and the filter outlet need to be emptied separately!

Remove the filter bowl only if it is not pressurized!

Do not replace the clogging indicator while the filter is under pressure!

Functional and safety warranty only applicable when using genuine spare parts!

Service filter only by trained personnel!

Commissioning

Switch on system pump.

Maintenance

If at operating temperature, the red indicator pin shows out of the clogging indicator (pos. 4) so far that it contacts the plastic cap and/or if the switching process in the electric display is triggered, the filter element is clogged and needs to be replaced or cleaned respectively.

Filter element replacement

Switch off the system pump and depressurize the system.

Unscrew the filter bowl (pos. 2) and/or the bottom (pos. 5) (only with FEN 1000) of the filter bowl (pos. 2) and remove the filter element (pos. 3) from the centering spigot on the filter head (pos. 1) by turning it lightly.

Check the filter head for cleanliness and clean if necessary.

Replace filter elements H...-XL and P..., clean the filter element with material G

The efficiency of the cleaning process depends on the type of contamination and the value of the pressure differential before the filter element was exchanged. If the pressure differential after replacing the filter element is more than 50% of the value before replacing the filter element then the G.... element also needs to be replaced.

Install the cleaned or new filter element with light turning movements back on to the centering spigot.

Check the seal ring (pos. 7) in the filter bowl for damage or wear and replace if necessary.

Screw on the filter bowl (pos. 2) and tighten via the hexagon using a suitable tool.

Carry out commissioning as described above.

Technical modifications reserved!